

Technical Data Sheet

Top View LED

67-21/R7SC-AQ1S1BZ/2T/AM

Features

- Pb-free.
- Inner reflector.
- White package.
- Optical indicator.
- P-LCC-2 package.
- Wide viewing angle.
- Colorless clear resin.
- Precondition : According to JEDEC Level-3.
- ESD : Up to 2KV. (According to JESD22-A114-B)
- The product itself will remain within RoHS compliant version.
- Suitable for vapor-phase reflow, infrared reflow and wave solder processes.



Descriptions

- The 67-21 series is available for orange, green, blue and yellow or other color due to the different raw material.
- Base on the package design, the device result in wide view angle.

Applications

- Automotive backlighting or indicator : Dashboard, switch, audio and video equipments...etc.
- Backlight : LCD, switches, symbol, mobile phone and illuminated advertising.
- Display for indoor and outdoor application : Traffic...etc.
- Ideal for coupling into light guides.
- Substitution of traditional light
- Optical indicator
- General applications.

Device Selection Guide



Chip	Emitted Color	Resin Color
Material		
AlGaInP	Dark Red	Water Clear

Technical Data Sheet


Top View LED

67-21/R7SC-AQ1S1BZ/2T/AM

Package Dimensions

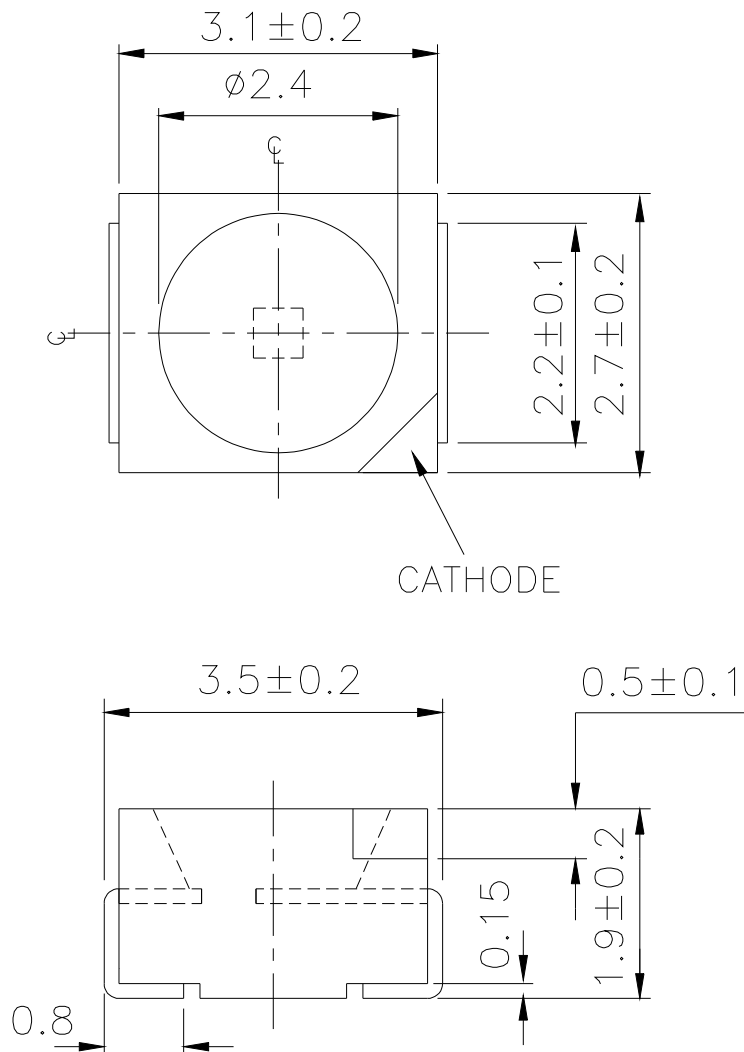

Polarity



Note : Tolerances unless mentioned ± 0.1 mm. Unit = mm



Technical Data Sheet

Top View LED

67-21/R7SC-AQ1S1BZ/2T/AM**Absolute Maximum Ratings (Ta=25°C)**

Parameter	Symbol	Rating	Unit
Reverse Voltage	VR	12	V
Forward Current	IF	30	mA
Peak Forward Current (Duty 1/10 @1KHz)	IFP	100	mA
Power Dissipation	Pd	120	mW
Junction Temperature	Tj	115	°C
Operating Temperature	Topr	-40 ~ +100	°C
Storage Temperature	Tstg	-40 ~ +110	°C
Thermal resistance	Rth J-A	400	K/W
	Rth J-S	180	K/W
Soldering Temperature	Tsol	Reflow Soldering : 260 °C for 10 sec. Hand Soldering : 350 °C for 3 sec.	

CONFIDENTIAL

Technical Data Sheet

Top View LED

67-21/R7SC-AQ1S1BZ/2T/AM

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	I _v	72	-----	225	mcd	I _F =10mA
Viewing Angle	2 θ 1/2	-----	120	-----	deg	I _F =10mA
Peak Wavelength	λ _p	-----	639	-----	nm	I _F =10mA
Dominant Wavelength	λ _d	625.5	-----	637.5	nm	I _F =10mA
Spectrum Radiation Bandwidth	Δλ	-----	20	-----	nm	I _F =10mA
Forward Voltage	V _F	1.75	-----	2.35	V	I _F =10mA
Reverse Current	I _R	-----	-----	10	μ A	V _R =12V
Temperature coefficient of λ _p	TCλ _p	-----	0.15	-----	nm/K	I _F =10mA
Temperature coefficient of λ _d	TCλ _d	-----	0.07	-----	nm/K	I _F =10mA
Temperature coefficient of V _F	TC _V	-----	-2.20	-----	mV/K	I _F =10mA

Notes:

- 1.Tolerance of Luminous Intensity : ±11%
- 2.Tolerance of Dominant Wavelength : ±1nm
- 3.Tolerance of Forward Voltage : ±0.1V



Technical Data Sheet

Top View LED

67-21/R7SC-AQ1S1BZ/2T/AM**Bin Range of Luminous Intensity**

Bin	Min	Max	Unit	Condition
Q1	72	90	mcd	I _F =10mA
Q2	90	112		
R1	112	140		
R2	140	180		
S1	180	225		

Notes : Tolerance of Luminous Intensity : $\pm 11\%$ **Bin Range of Dominant Wavelength**

Group	Bin Code	Min.	Max.	Unit	Condition
A	E6	625.5	629.5	nm	I _F =10mA
	E7	629.5	633.5		
	E8	633.5	637.5		

Notes : Tolerance of Dominant Wavelength : $\pm 1\text{nm}$ **Bin Range of Forward Voltage**

Group	Bin	Min.	Max.	Unit	Condition
B	0	1.75	1.95	V	I _F =10mA
	1	1.95	2.15		
	2	2.15	2.35		

Notes : Tolerance of Forward Voltage : $\pm 0.1\text{V}$


Technical Data Sheet

Top View LED

67-21/R7SC-AQ1S1BZ/2T/AM


Typical Electro-Optical Characteristics Curves (Ta=25°C)

Typical Curve of Spectral Distribution :

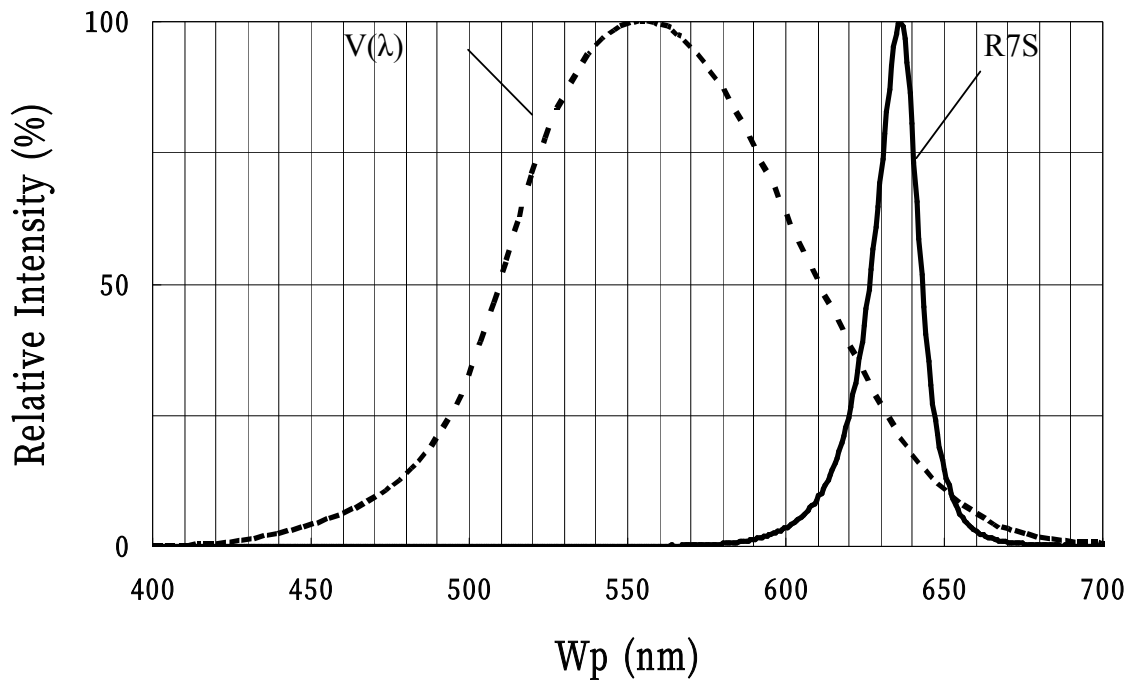

Note : $V(\lambda)$ = Standard eye response curve ; $I_F = 20 \text{ mA}$

Diagram characteristics of radiation

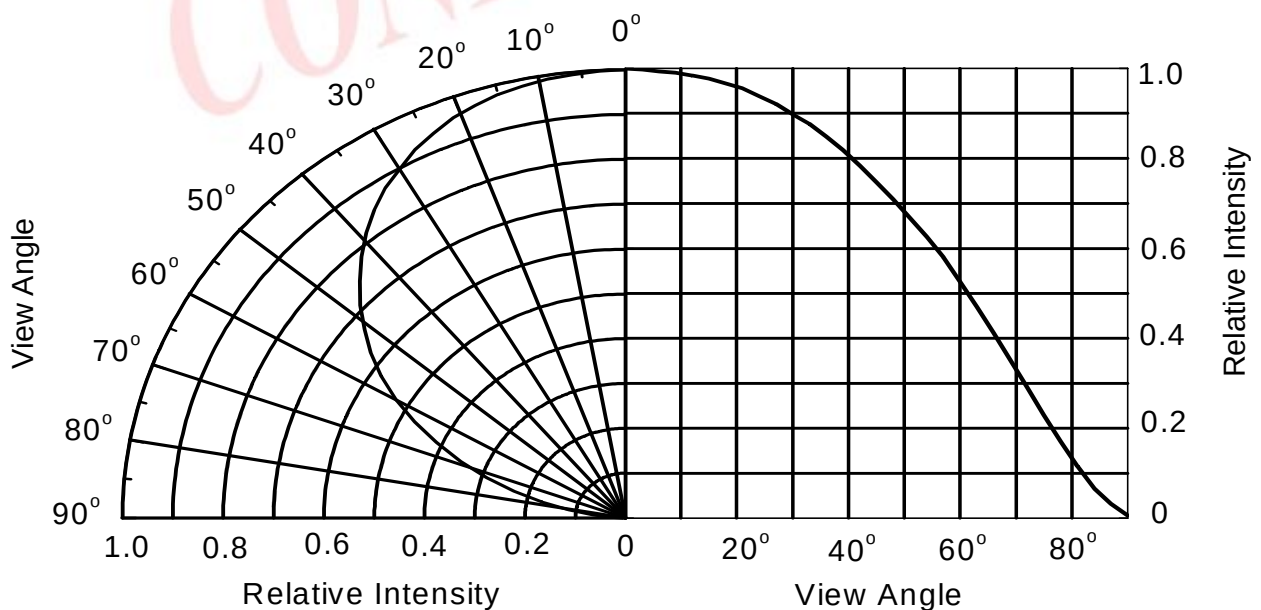


Technical Data Sheet


Top View LED

67-21/R7SC-AQ1S1BZ/2T/AM

Forward Current vs. Forward Voltage

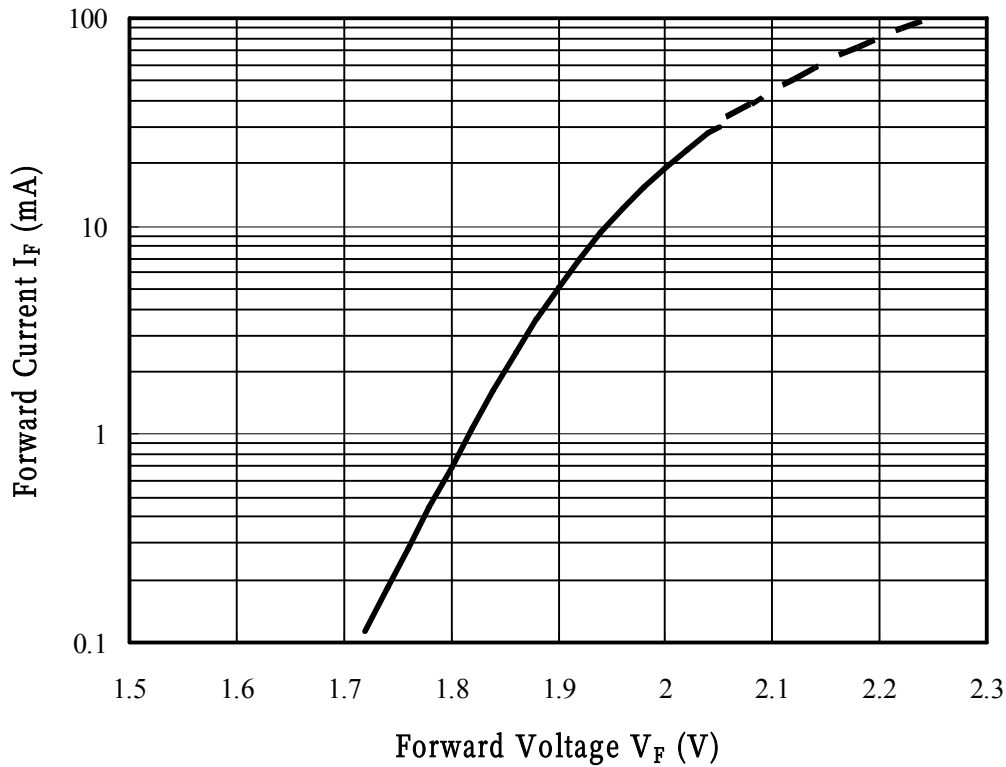

Forward Current vs. Ambient Temperature.

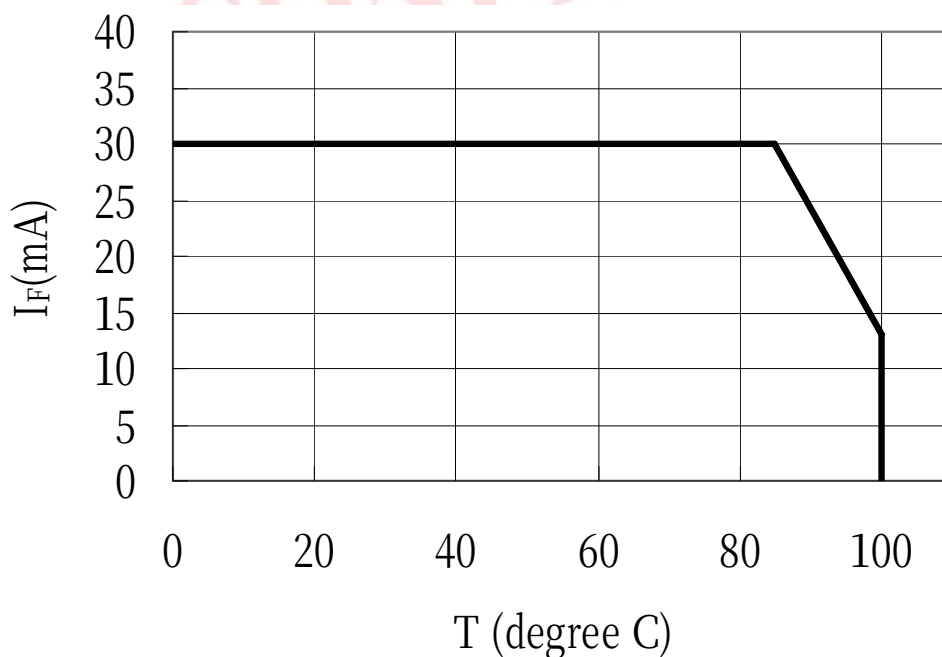


Technical Data Sheet

Top View LED


67-21/R7SC-AQ1S1BZ/2T/AM

Relative Luminous Intensity vs. Junction Temperature.

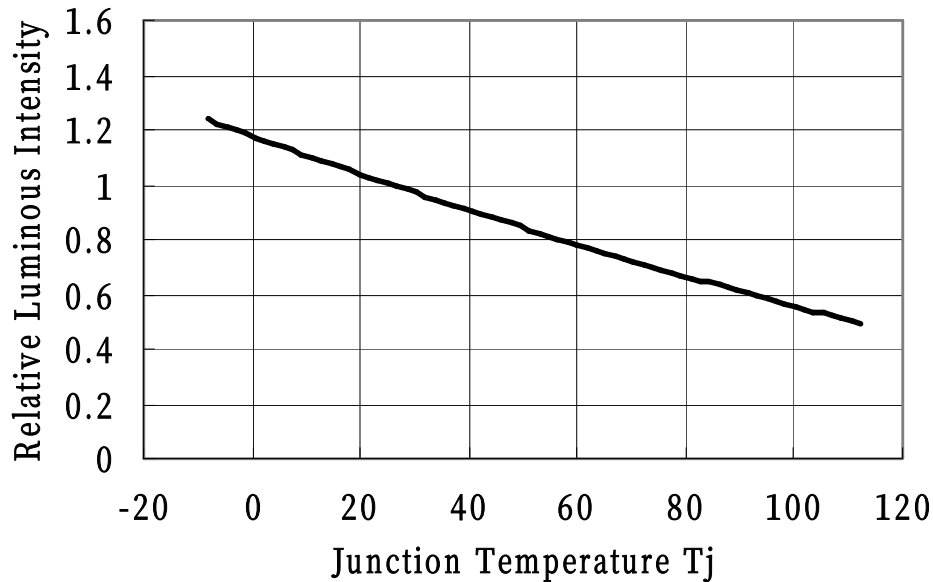

Note : $f(T_j) = I_v / I_v(25^\circ\text{C})$; $I_F=20\text{mA}$

Relative Forward Voltage vs. Junction Temperature.

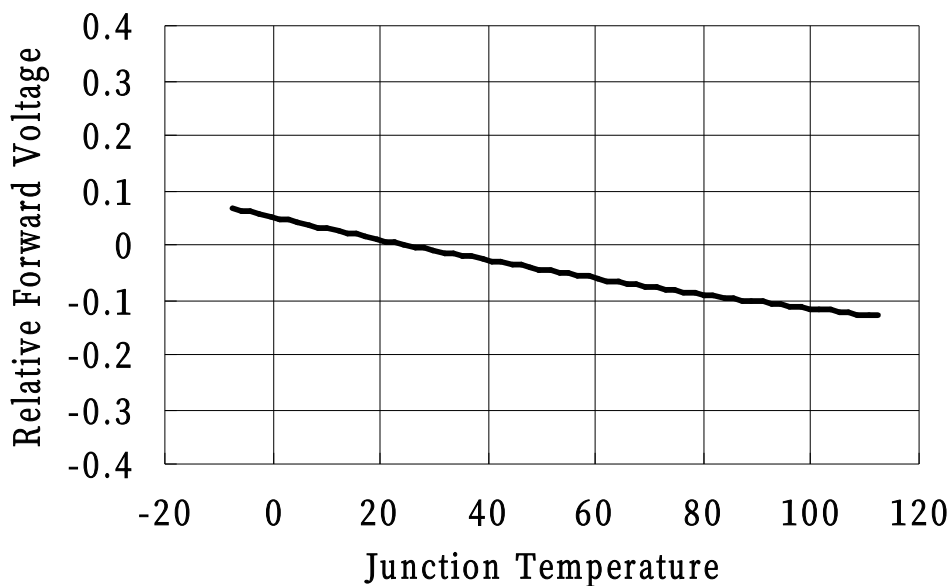

Note : $\Delta V_F = V_F - V_F(25^\circ\text{C}) = f(T_j)$; $I_F=20\text{mA}$


Technical Data Sheet

Top View LED


67-21/R7SC-AQ1S1BZ/2T/AM

Label Explanation

- CPN : Customer's Product Number
- P/N : Product Number
- QTY : Packing Quantity
- CAT : Luminous Intensity Rank
- HUE : Dom. Wavelength Rank
- REF : Forward Voltage Rank
- LOT No : Lot Number

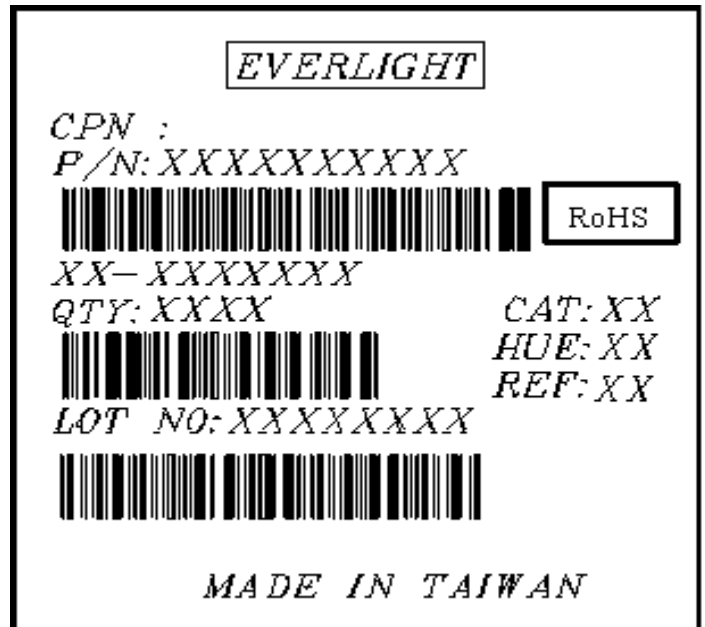

Reel Dimensions

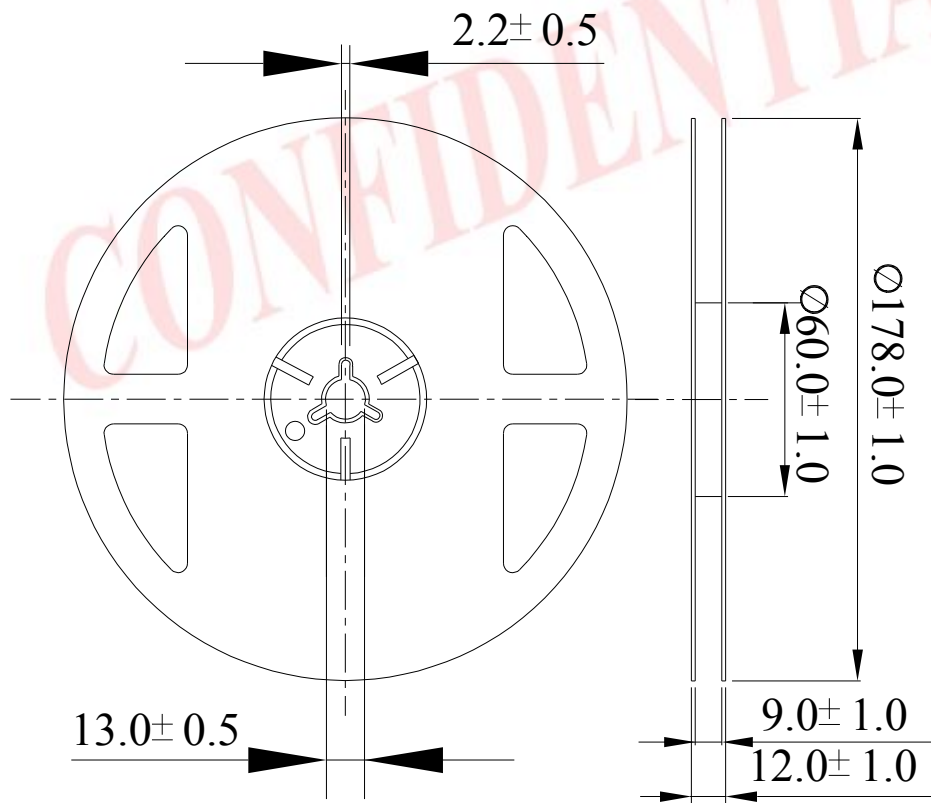


Note : Unit = mm

Technical Data Sheet

Top View LED


67-21/R7SC-AQ1S1BZ/2T/AM

Carrier Tape Dimensions: Loaded Quantity 2000 pcs Per Reel

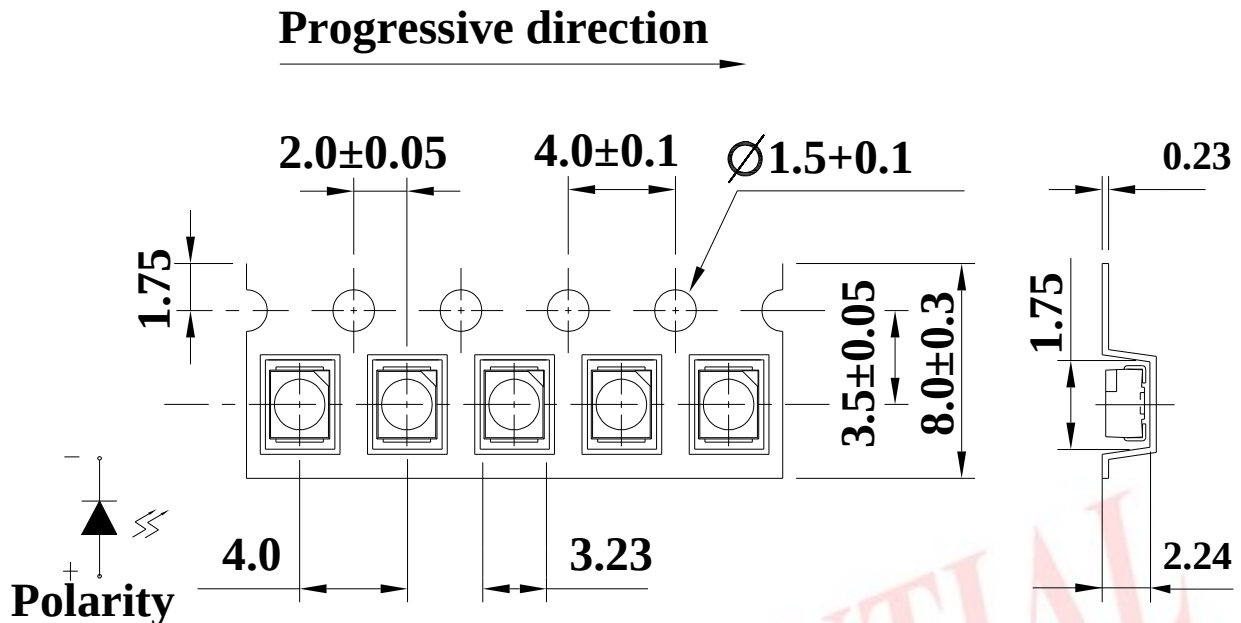

Note : Tolerances unless mentioned ± 0.1 mm. Unit = mm

Moisture Resistant Packaging Process and Materials

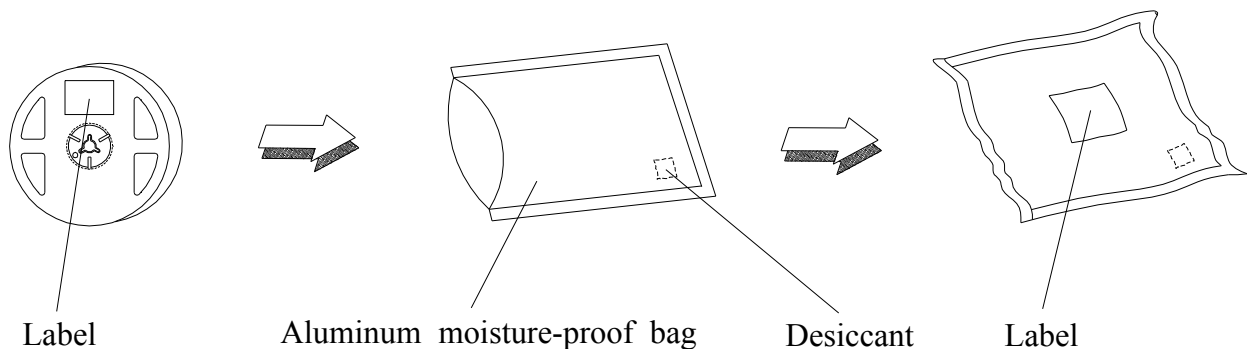

Technical Data Sheet


Top View LED

67-21/R7SC-AQ1S1BZ/2T/AM


Precautions for Use

1. Soldering Condition

1.1 (A) Pb-free solder temperature profile

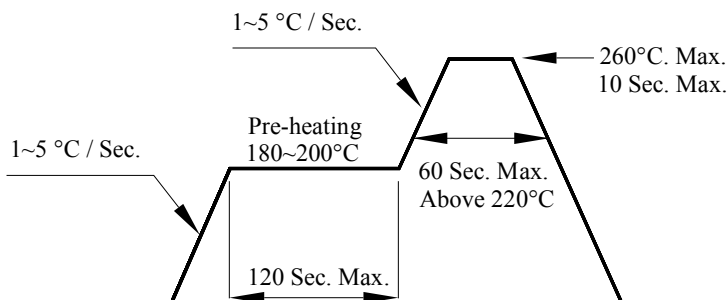

(B) Recommend soldering pad

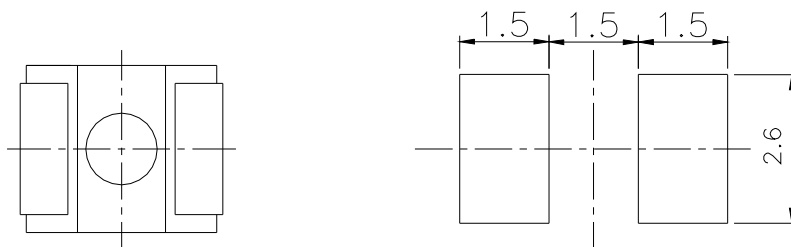

Note : Tolerances unless mentioned $\pm 0.1\text{mm}$. Unit = mm

1.2 Reflow soldering should not be done more than two times.

1.3 When soldering, do not put stress on the LED during heating.

1.4 After soldering, do not warp the circuit board.

2. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

3. Storage

3.1 Do not open moisture proof bag before the products are ready to use.

3.2 Before opening the package: The LED should be kept at 30°C or less and 90%RH or less.

3.3 After opening the package: The LED floor life is 1 year under 30°C or less and 60% RH or less. If unused LED remain, it should be stored in moisture proof packages.



Technical Data Sheet

Top View LED

67-21/R7SC-AQ1S1BZ/2T/AM

3.4 If the moisture absorbent material (silica gel) has faded away or the LED have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : $60\pm 5^{\circ}\text{C}$ for 24 hours.

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

CONFIDENTIAL