

Technical Data Sheet

Top View LEDs

67-21-R7C-F3K1L1B6A-2T8-AM



Feature

- RoHS compliant.
- P-LCC-2 package.
- Wide viewing angle 120°.
- Colorless clear resin.
- Brightness: 7.1 to 14mcd at 2mA
- Inner reflector and white package.
- Precondition: Bases on JEDEC J-STD 020D Level 3.
- Qualification according to AEC-Q101 rev C.
- Useable in severe lead free processes with automotive reflow profile (IR reflow or wave soldering)

Applications

- Automotive backlighting or indicator: Dashboard, switch, audio and video equipments...etc.
- Backlight: LCD, switches, symbol, mobile phone and illuminated advertising.
- Display for indoor and outdoor application.
- Ideal for coupling into light guides.
- Substitution of traditional light.
- Optical indicator.
- General applications.

Device Selection Guide

Chip	Emitted Color	Resin Color
Material		
AlGaInP	Dark Red	Water Clear

Technical Data Sheet

Top View LEDs

67-21-R7C-F3K1L1B6A-2T8-AM

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Reverse Voltage	V_R	12	V
Forward Current	I_F	25	mA
Peak Forward Current (Duty 1/10 @1KHz)	I_{FP}	60	mA
Power Dissipation	P_d	60	mW
Junction Temperature	T_j	125	°C
Operating Temperature	T_{opr}	-40 ~ +100	°C
Storage Temperature	T_{stg}	-40 ~ +110	°C
Thermal resistance	$R_{th\ J-A}$	420	K/W
	$R_{th\ J-S}$	260	K/W
ESD (Classification acc. AEC Q101)	ESD_{HBM}	2000	V
	ESD_{MM}	200	V
Soldering Temperature	T_{sol}	Reflow Soldering : 260 °C for 30 sec. Hand Soldering : 350 °C for 3 sec.	

Technical Data Sheet

Top View LEDs

67-21-R7C-F3K1L1B6A-2T8-AM

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	I_v	7.1	---	14	mcd	$I_F = 2\text{mA}$
Viewing Angle	$2\theta_{1/2}$	---	120	---	deg	$I_F = 2\text{mA}$
Peak Wavelength	λ_p	---	639	---	nm	$I_F = 2\text{mA}$
Dominant Wavelength	λ_d	625	---	638	nm	$I_F = 2\text{mA}$
Spectrum Radiation Bandwidth	$\Delta\lambda$	---	20	---	nm	$I_F = 2\text{mA}$
Forward Voltage	V_F	1.7	---	2.4	V	$I_F = 2\text{mA}$
Reverse Current	I_R	---	---	10	μA	$V_R = 12\text{V}$
Temperature coefficient of λ_p	TC_{λ_p}	---	0.15	---	nm/K	$I_F = 2\text{mA}$
Temperature coefficient of λ_d	TC_{λ_d}	---	0.07	---	nm/K	$I_F = 2\text{mA}$
Temperature coefficient of V_F	TC_V	---	-2.20	---	mV/K	$I_F = 2\text{mA}$

Note:

1. Tolerance of Luminous Intensity: $\pm 11\%$
2. Tolerance of Dominant Wavelength: $\pm 1\text{nm}$
3. Tolerance of Forward Voltage: $\pm 0.1\text{V}$

Technical Data Sheet

Top View LEDs

67-21-R7C-F3K1L1B6A-2T8-AM

Bin Range of Luminous Intensity

Bin Code	Min.	Max.	Unit	Condition
K1	7.1	9	mcd	$I_F = 2\text{mA}$
K2	9	11.2		
L1	11.2	14		

Note:

Tolerance of Luminous Intensity: $\pm 11\%$

Bin Range of Dominant Wavelength

Bin Code	Min.	Max.	Unit	Condition
1	625	629	nm	$I_F = 2\text{mA}$
2	629	633		
3	633	638		

Note:

Tolerance of Dominant Wavelength: $\pm 1\text{nm}$


Technical Data Sheet

Top View LEDs

67-21-R7C-F3K1L1B6A-2T8-AM


Typical Electro-Optical Characteristics Curves

Typical Curve of Spectral Distribution

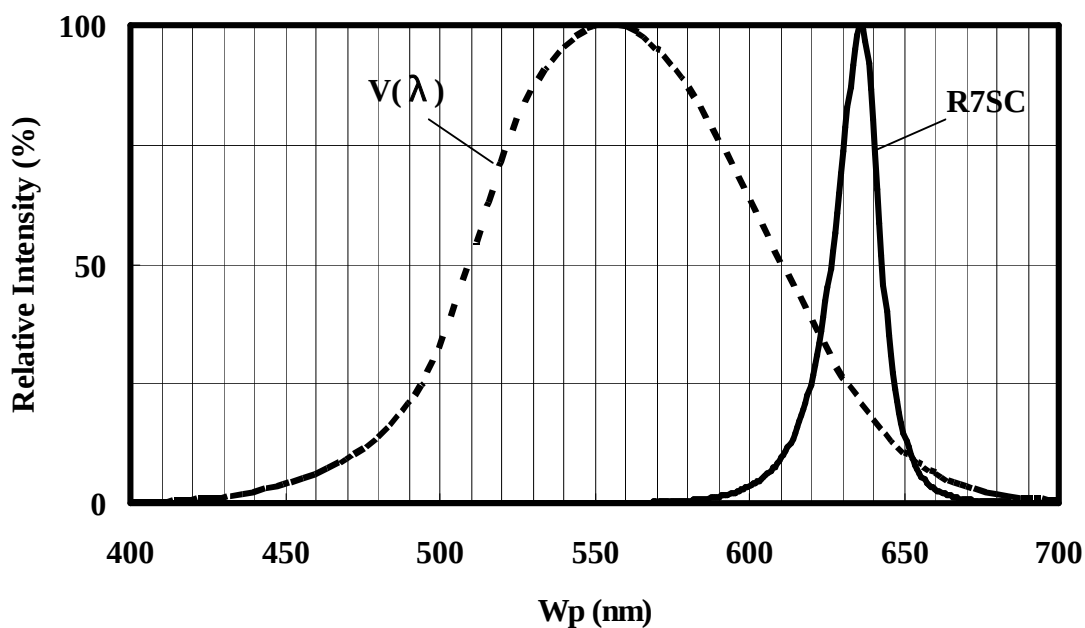

Note: $V(\lambda)$ =Standard eye response curve; $I_F = 2\text{mA}$

Diagram Characteristics of Radiation

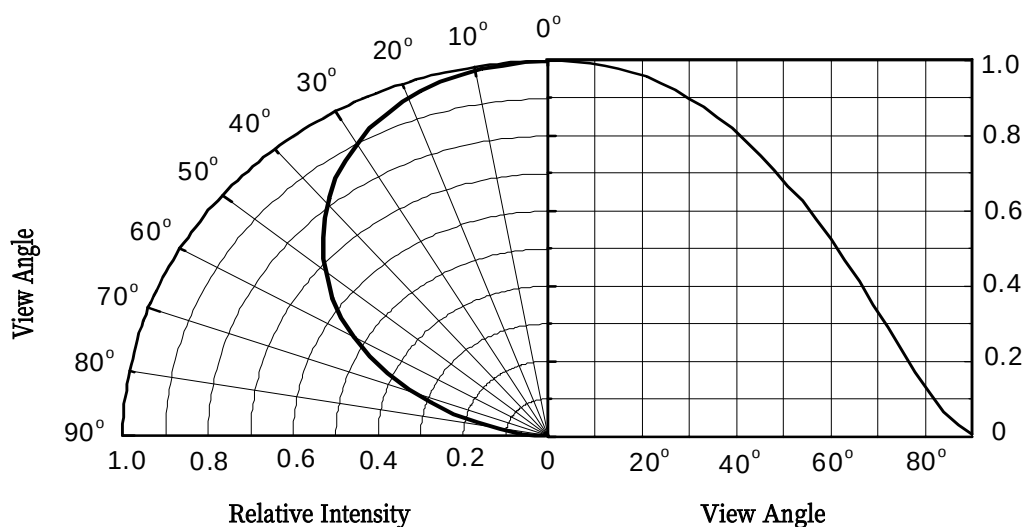


Technical Data Sheet


Top View LEDs

67-21-R7C-F3K1L1B6A-2T8-AM

Forward Current vs. Forward Voltage (Ta=25°C)

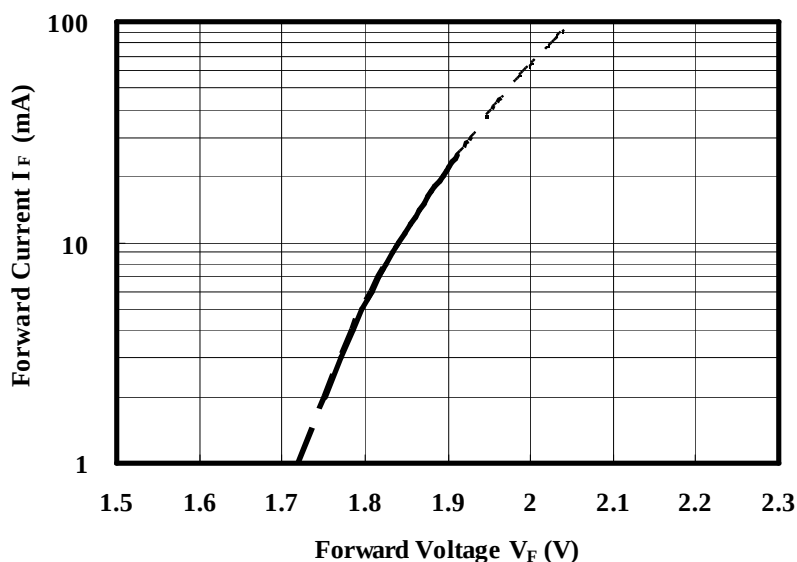

Relative Luminous Intensity vs. Forward Current (Ta=25°C)

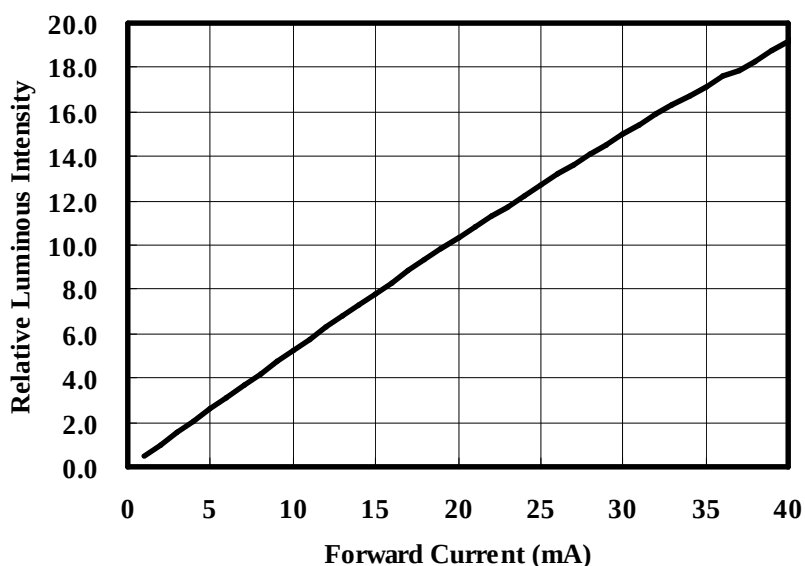


Technical Data Sheet


Top View LEDs

67-21-R7C-F3K1L1B6A-2T8-AM

Forward current vs. Ambient and Solder Temperature

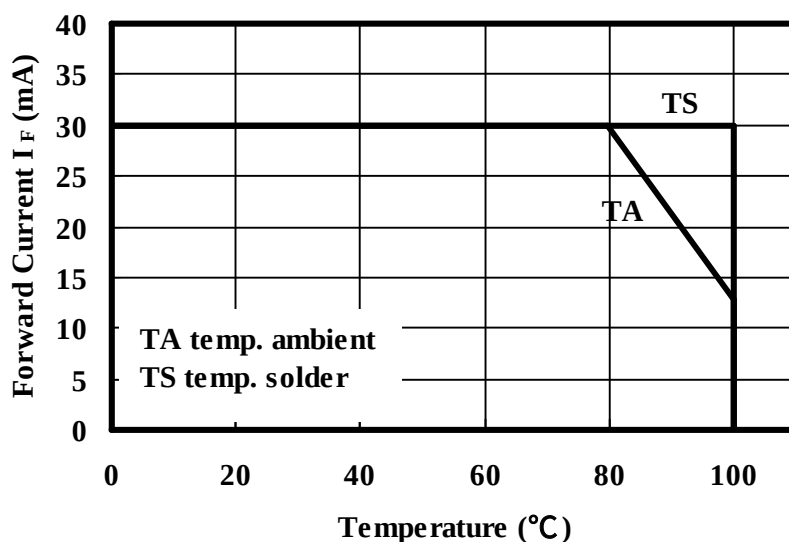

Relative Luminous Intensity vs. Junction Temperature

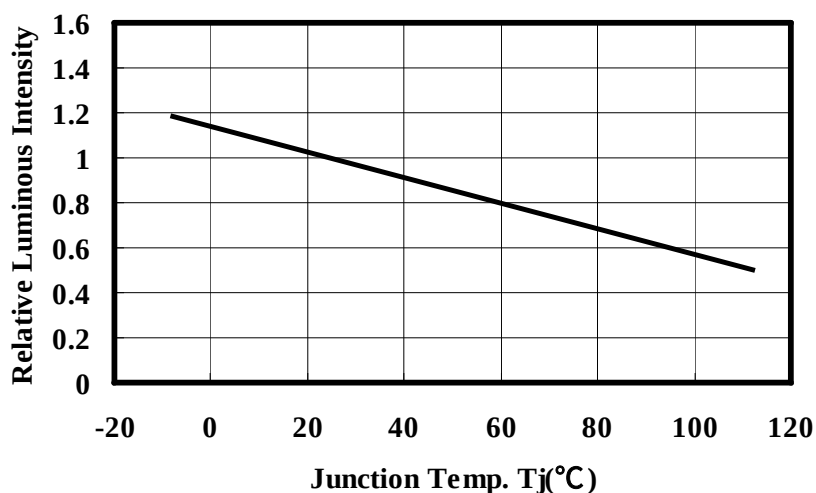


Note: $f(T_j) = I_v / I_v(25^\circ\text{C})$; $I_F = 2\text{mA}$

Technical Data Sheet

Top View LEDs

67-21-R7C-F3K1L1B6A-2T8-AM

Relative Forward Voltage vs. Junction Temperature

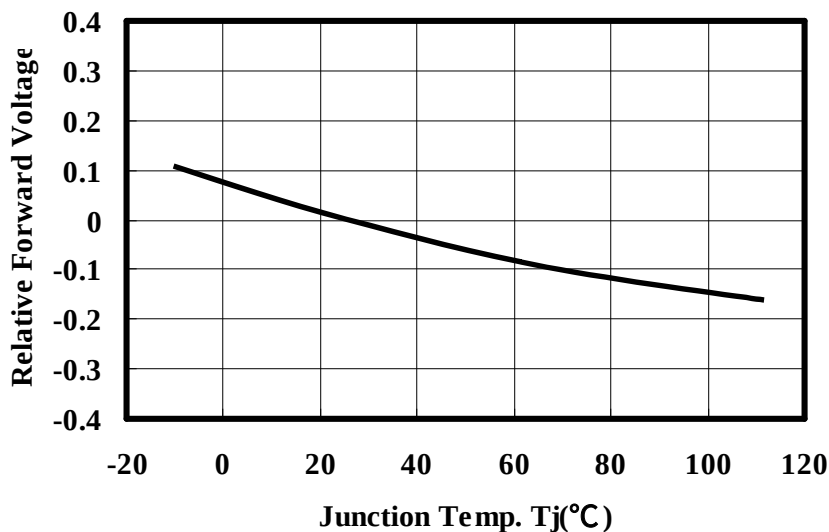

Note: $\Delta V_F = V_F - V_F(25^\circ\text{C}) = f(T_j)$; $I_F = 2\text{mA}$



CONFIDENTIAL

Technical Data Sheet

Top View LEDs

67-21-R7C-F3K1L1B6A-2T8-AM

Package Dimension

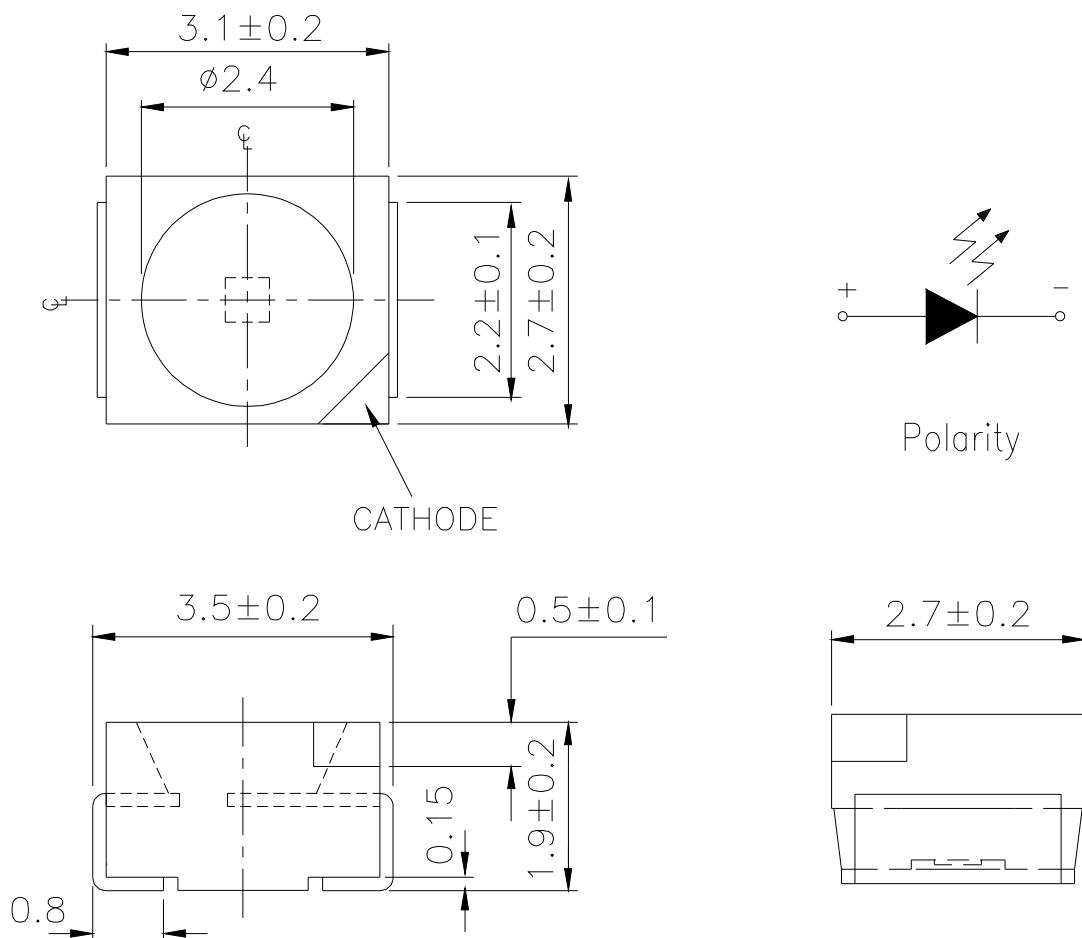

Polarity

Note: Tolerances unless mentioned ± 0.1 mm. Unit = mm


Technical Data Sheet

Top View LEDs


67-21-R7C-F3K1L1B6A-2T8-AM

Label Explanation

- CPN: Customer's Product Number
- P/N: Product Number
- QTY: Packing Quantity
- CAT: Luminous Intensity Rank
- HUE: Dom. Wavelength Rank
- REF: Forward Voltage Rank
- LOT No: Lot Number

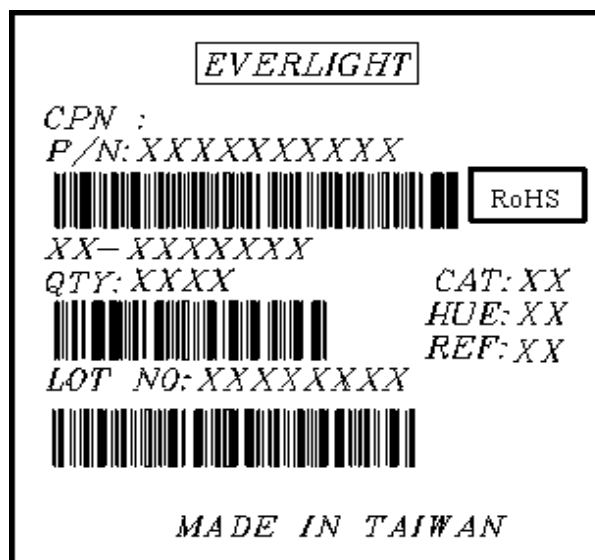

Reel Dimensions

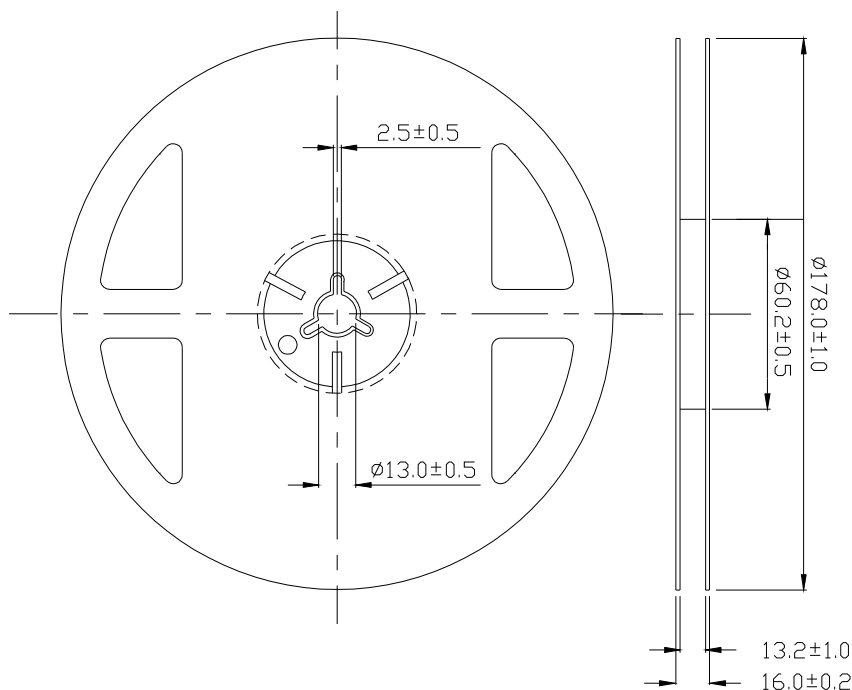


Note: Unit = mm

Technical Data Sheet

Top View LEDs


67-21-R7C-F3K1L1B6A-2T8-AM

Carrier Tape Dimensions: Loaded Quantity 2000 pcs Per Reel

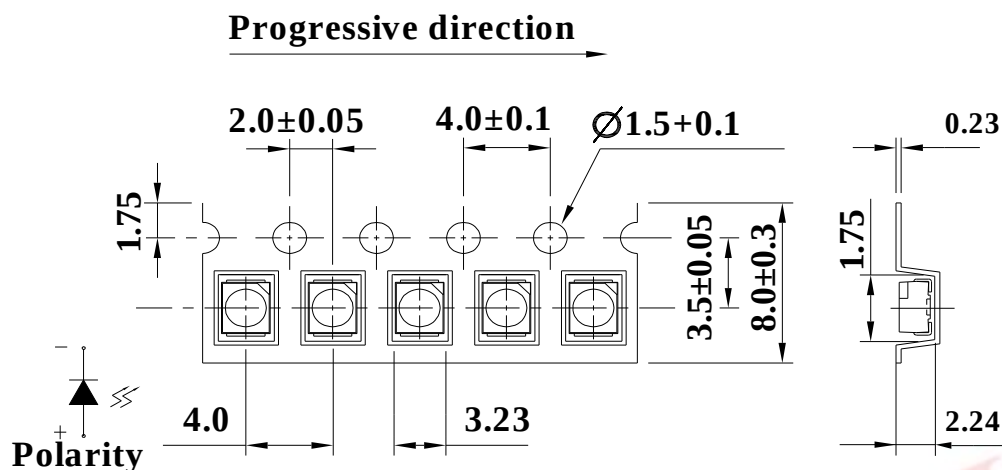

Note: Tolerances unless mentioned $\pm 0.1\text{mm}$. Unit = mm

Moisture Resistant Packing Process

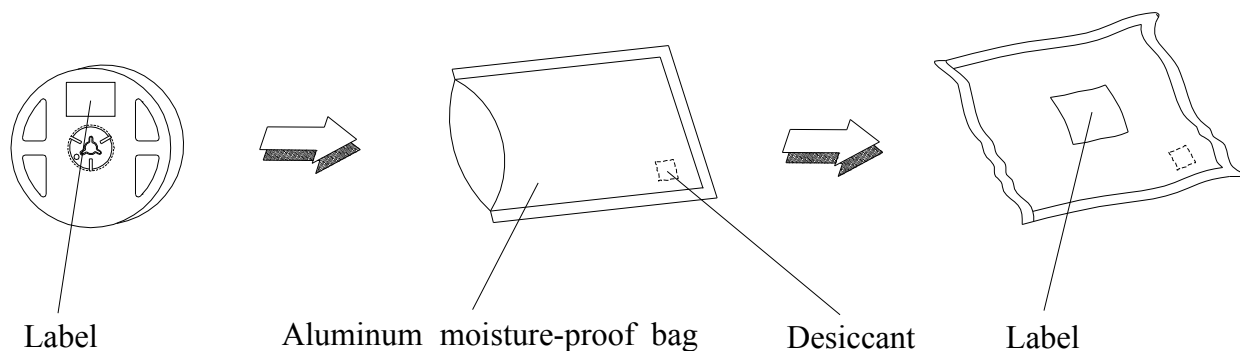

Technical Data Sheet


Top View LEDs

67-21-R7C-F3K1L1B6A-2T8-AM

Precautions for Use

1. Soldering Condition

1.1 (A) Maximum Body Case Temperature Profile for evaluation of Reflow Profile

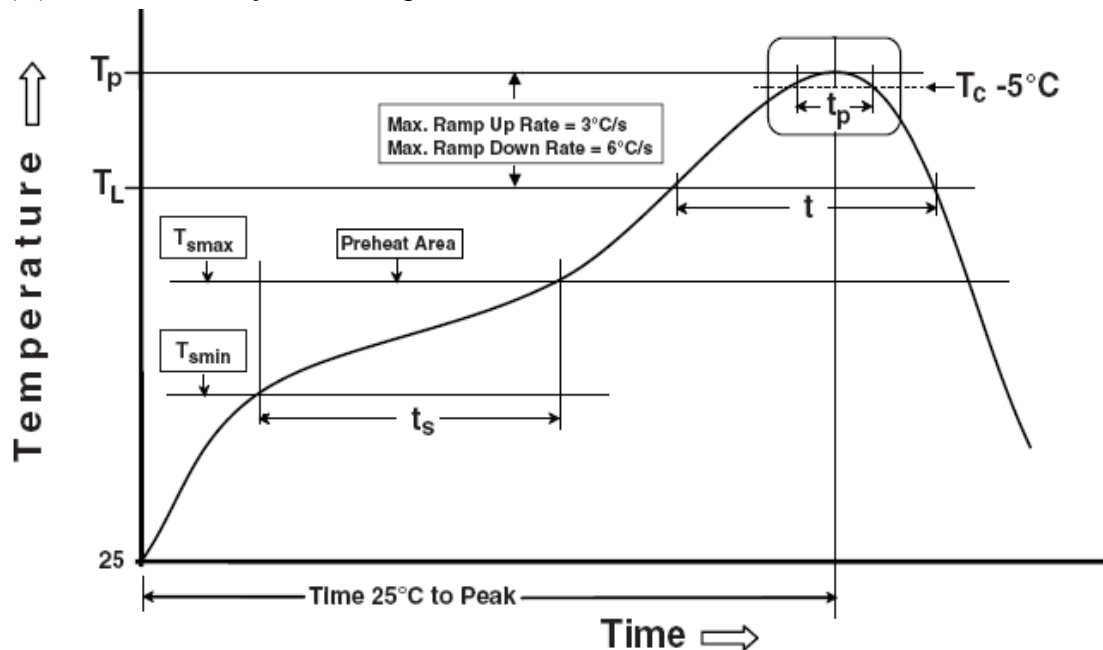

Note:

Preheat

Temperature min (T_{smin})

Reference: IPC/JEDEC J-STD-020D

150 °C

Temperature max (T_{smax})

200°C

Time (T_{smin} to T_{smax}) (t_s)

60-120 seconds

Average ramp-up rate (T_{smax} to T_p)

3 °C/second max

Other

Liquidus Temperature (T_L)

217 °C

Time above Liquidus Temperature (t_L)

60-150 sec

Peak Temperature (T_p)

260°C

Time within 5 °C of Actual Peak Temperature: $T_p - 5^\circ\text{C}$

30 s

Ramp- Down Rate from Peak Temperature

6°C /second max.

Time 25°C to peak temperature

8 minutes max.

Reflow times

3 times


All parameters are maximum body case temperature values and cannot be considered as a soldering profile. The body temperature was measured by soldering a thermal couple to the soldering point of LEDs.

Technical Data Sheet

Top View LEDs

67-21-R7C-F3K1L1B6A-2T8-AM

(B) Recommend soldering pad

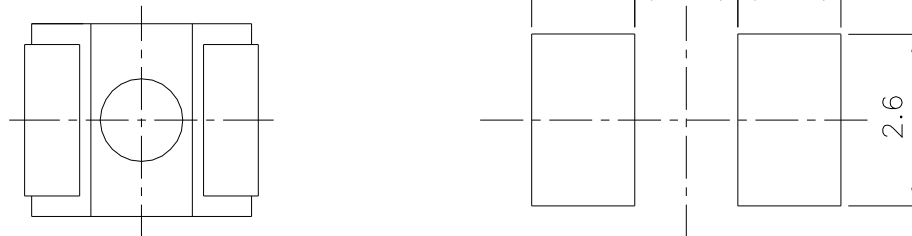

Note: Tolerances unless mentioned $\pm 0.1\text{mm}$. Unit = mm

2. Current limiting

A resistor should be used to limit current spikes that can be caused by voltage fluctuations. Otherwise damage could occur.

3. Storage

- 3.1 Moisture proof bag should only be opened immediately prior to usage.
- 3.2 Environment should be less than 30°C and 90% RH when moisture proof bag is opened.
- 3.3 After opening the package MSL Conditions stated on page 1 of this spec should not be exceeded.
- 3.4 If the moisture sensitivity card indicates higher than acceptable moisture, the component should be baked at min. $60^{\circ}\text{C} \pm 5^{\circ}\text{C}$ for 25 hours.

4. Iron Soldering

Hand soldering is not recommended for regular production. These guidelines are for rework only. Soldering iron tip should contact each terminal no more than 3 sec at 350°C , using soldering iron with nominal power less than 25W. Allow min. 2 sec. between soldering intervals.

5. Usage

Do not exceed the values given in this specification.

Application Restrictions

High reliability applications such as military/aerospace, automotive safety/security systems, and medical equipment may require different product. If you have any concerns, please contact Everlight before using this product in your application. This specification guarantees the quality and performance of the product as an individual component. Do not use this product beyond the specification described in this document.